Installation Instructions

X-ray Viewer w/ Articulating Arm

GENERAL INFORMATION

Only for mounting a viewer manufactured by Clive Craig Co., their Part Number 31325. Viewer must be purchased separately.

PANEL / ARTICULATING ARM INSTALLATION

EQUIPMENT ALERT

Do not over-tighten hex head mounting bolts.Torque to 50-55 inch / lbs.

A. Place Privacy Panel w/ Articulating Arm in position and secure with two #10-24 x 5/8" Hex head screws (Column side) and two #10-24 x 5/8" phillips head screws (Dispenser side)
Remove towel and cup dispenser.

B. Remove cover from adhesive tape, press Cover Panel in position on Dispenser Unit, and secure with three #10-24 x 3/8" phillips head screws.
Install towel and cup dispenser.

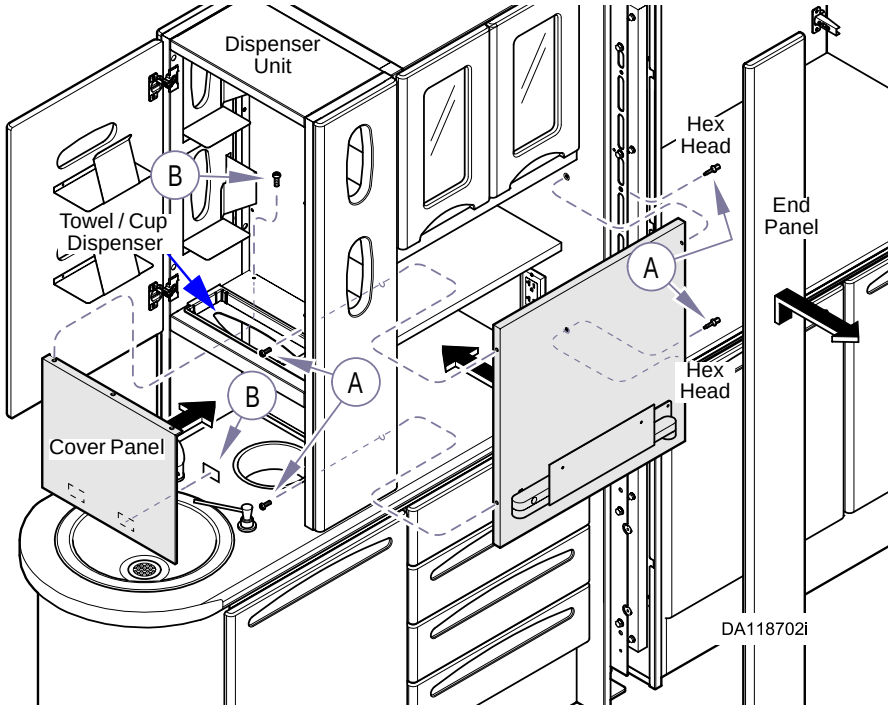

VIEWER INSTALLATION

A. Remove view cover and bulb

NOTE

Slits must be cut in reflector of Viewbox at keyholes for insertion of mounting screws

B. Using keyholes as guides, cut slits in reflector for mounting screws.

C. Secure Viewer to mounting plate (two #10-24 x 3/8" phillip screws and nuts) then install bulb and view cover.

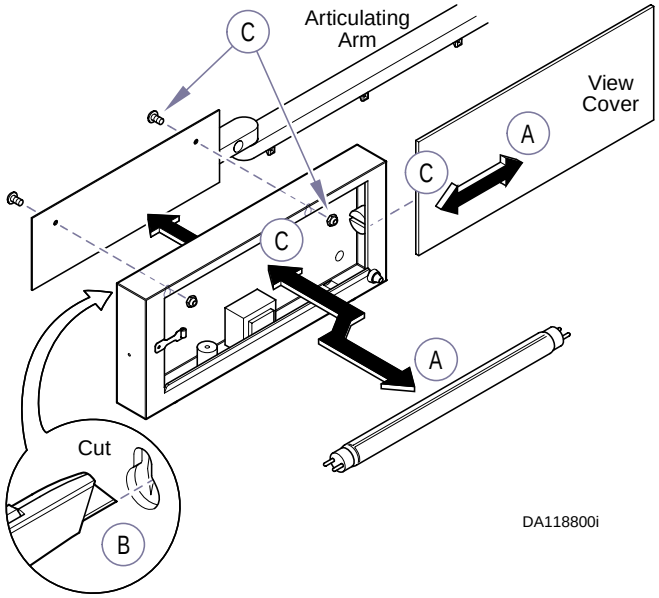

© Midmark Corporation - 2002

VIEWER POWER CORD INSTALLATION

A. Place grommet in position on Privacy Panel and insert Viewer power cord through grommet.

NOTE

Assure there is adequate slack in the power cord to allow for full movement of the articulating arm.

B. Allowing slack in cord for movement, secure power cord to Articulating Arm wire tie bases with wire ties.

C. Plug Viewer into outlet on Center Column.

D. Remove protective backing from cord clip and position clip on Privacy Panel and place cord in clip.

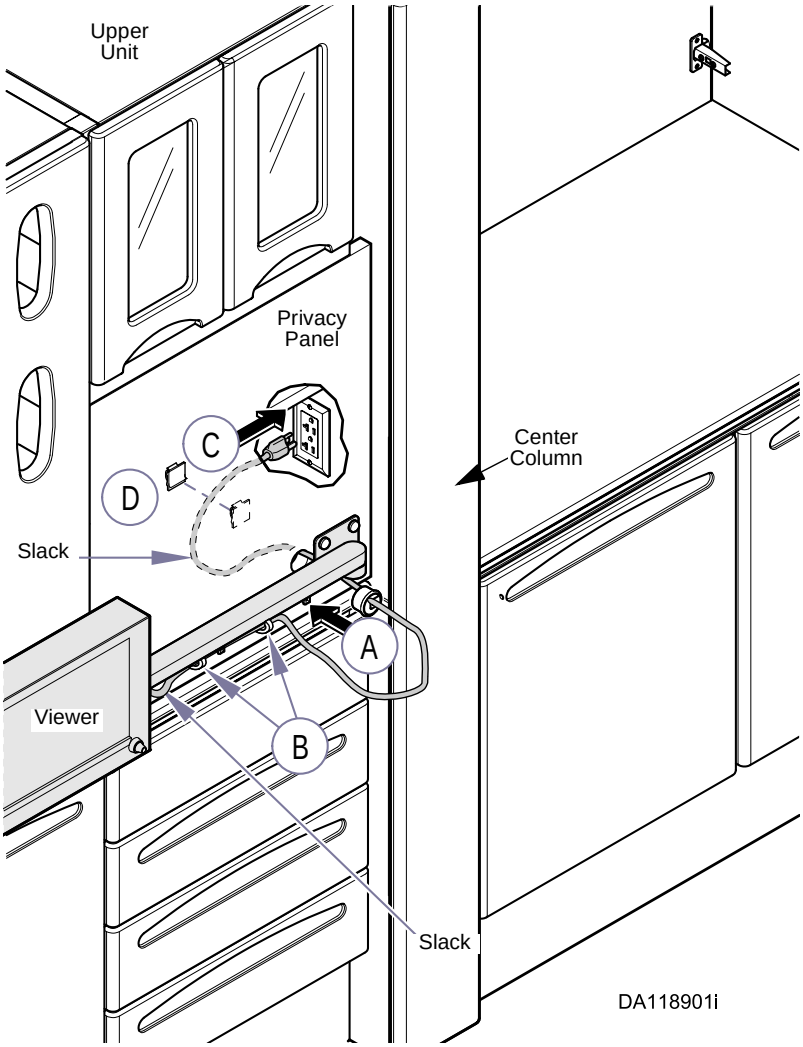

Midmark Corporation
60 Vista Drive
P.O. Box 286
Versailles, Ohio 45380-0286
937-526-3662
Fax 937-526-5542
midmark.com

003-1319-00 Rev. B (12/02)

© Midmark Corporation - 2002